
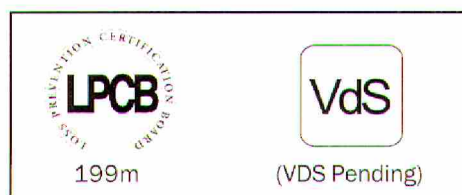


# MODEL ECO1003 CONVENTIONAL PHOTOELECTRIC SMOKE DETECTOR

## FEATURES

- Low profile design
- Low current draw
- Operates on 12 and 24VDC Systems
- Remote alarm test feature
- Easy Maintenance
- Range of detector bases available
- Remote LED Option
- Certified to EN54 part 7 (2000)
- Extended warranty

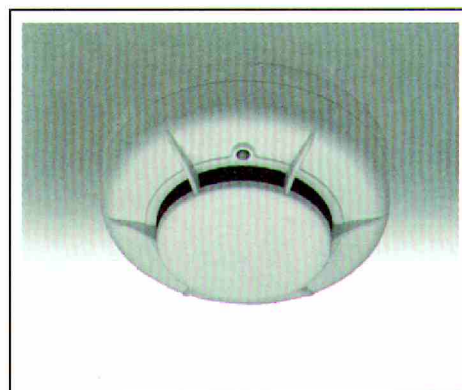

## DESCRIPTION

The ECO1003 photoelectric smoke detector belongs to System Sensor's ECO1000 range of detectors. ECO1000 is a range of conventional detectors, which have been produced using the latest in manufacturing technology and supplied with an array of advanced features, making them 'better by design'.

The ECO1003 photoelectric smoke detector uses a state of the art optical chamber combined with an application specific integrated circuit (ASIC) to provide quick and accurate detection of fires. A combination of the unique chamber design and other technically advanced features will significantly extend the service intervals before cleaning of the detector becomes necessary.

A laser-based hand held Remote Test Unit can be used in conjunction with the range of ECO1000 detectors for alarm test purposes. The unit transmits a coded message, preventing spurious alarms being generated by other laser-based devices. With a range of several metres, the hand held test unit provides a fast and simple way of remotely alarm testing the range of ECO1000 detectors and removes the need for any direct physical access to the detector by the user.

The ECO1003 detector has an integral LED, which illuminates to provide a local alarm signal. This latches on, and remains illuminated until the detector is reset by a momentary power interruption. An optional remote LED annunciator may be used to repeat any alarm signal.

A variety of detector bases can be used with the ECO1003 detector, providing application flexibility and compatibility with a wide range of Fire Alarm Control Panels. All bases are fitted with a shorting spring to permit circuit testing prior to fitting the detector and have a tamper resistant feature, which when activated prevents removal of the detector without the use of a tool.

All System Sensor products are covered by our extended 3-year warranty.


EUROPEAN HEADQUARTERS  
SYSTEM SENSOR EUROPE  
3 HORSHAM GATES  
HORSHAM  
WEST SUSSEX  
RH13 5PJ  
UNITED KINGDOM  
TEL. : +44 1403 276500  
FAX : +44 1403 276501  
e-mail: sales@systemsensor.co.uk

EUROPEAN MANUFACTURING CENTRE  
PITWAY TECNOLOGICA SPA  
VIA CABOTO 19  
34147 TRIESTE  
ITALY

TEL. : +39 40 9490 111  
FAX : +39 40 382137



## ECO1003 PHOTOELECTRIC SMOKE DETECTOR

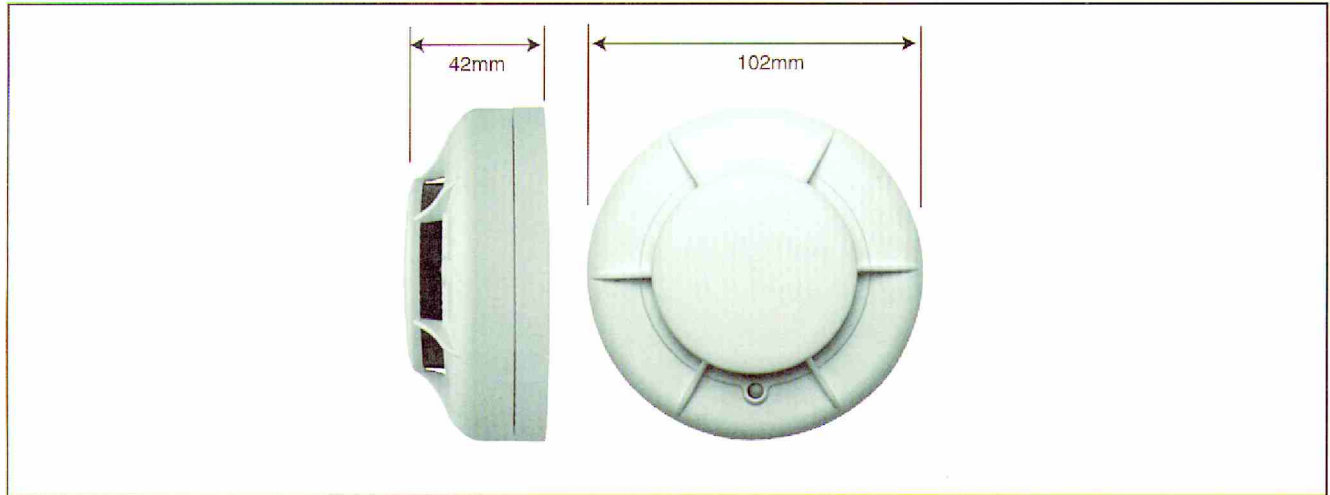

### SPECIFICATIONS

#### Electrical

Operating Voltage Range	8 to 30 VDC (Nominal 12/24VDC)
Typical Standby Current	120 $\mu$ A
Maximum Permissible Alarm Current	50mA (current limited by control panel)

#### Environmental

Operating Temperature Range	-20 °C to +60 °C -30 °C to +70 °C for Short Duration
Storage Temperature Range	-30 °C to +70 °C
Humidity	5 to 95% Relative Humidity (non-condensing)

#### Mechanical

Height (without base)	32.5mm
Diameter	102mm
Weight	75g
Max Wire Gauge for Terminals	1.5mm <sup>2</sup>
Colour	Approximates to RAL9016
Material	ABS

#### Product Range

Bases (see note)	ECO1000B Standard Base ECO1000BSD Standard base with schottly diode ECO100R Resistor base 470 ohm ECO1000BRSD Resistor base 470 ohm with schottly diode
Accessories	ECO1000RTU Remote Test Unit
Other Detectors	ECO1002 Photoelectric/Thermal Detector ECO1005 Rate of Rise & Fixed Temperature Thermal Detector ECO1005T Fixed Temperature Thermal Detector

Note: Bases with other resistor values are available to suit the requirements of most Fire Alarm Control Panels.

EUROPEAN HEADQUARTERS  
SYSTEM SENSOR EUROPE  
3 HORSHAM GATES  
HORSHAM  
WEST SUSSEX  
RH13 5PJ  
UNITED KINGDOM  
TEL: +44(0)1403 276500  
FAX: +44(0)1403 276501  
EMAIL: SALES@SSEUK.COM

EUROPEAN MANUFACTURING CENTRE  
PITTMAY TECNOLOGICA SPA  
VIA CABOTO 19/3  
34147 TRIESTE  
ITALY

TEL: +39 040 9490 111  
FAX: +39 040 382137

WWW.SYSTEMSENSOREUROPE.COM

