GENERAL DESCRIPTION

Attractive and durable, the MRI-MPG Series of pull stations provide manual fire reporting. The MRI-MPG series pull stations are non-coded, single or double action devices which initiate an alarm when pulled.

Resetting is accomplished by inserting a 1/8" screwdriver from the front. The handle, once pulled will remain open and cannot be reset without utilizing the screwdriver.

The MRI-MPG Pull stations are constructed of durable aluminum and finished in red. An abrasion resistant label with large, raised letters provide clear legible instructions.

The model MRI-MPG2 (two stage) is similar to the MRI-MPG1 (single stage) except it contains an additional General Alarm (G.A.) N.O. switch. For safety reasons, the G.A. switch is only accessible after the handle has been pulled. A special key is supplied with each unit.

All pull stations can be easily converted from single action to double action by the addition of the MRM-MSDA double action lever.
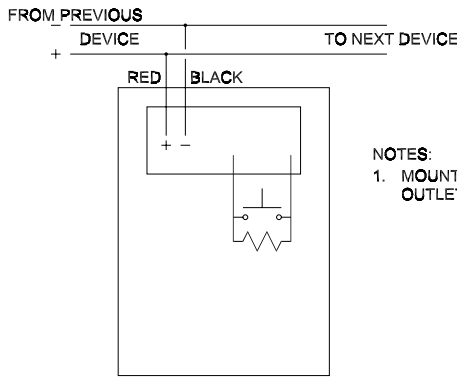
OPERATION

Pulling on the station's handle will release the internal switch to trigger the alarm detection circuit.

The MRI-MPG2 (two stage version) also provide a key switch which is accessible after the handle has been pulled. Operation of the key switch, when connected to a separate general alarm circuit, will initiate the 2nd stage of a two stage alarm signalling system.
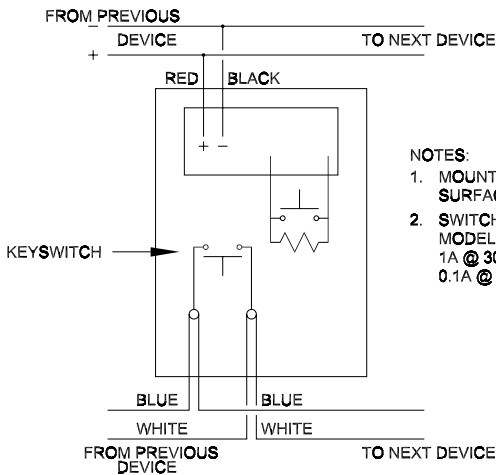
FEATURES

- **UL and ULC Listed**
- **Durable Extruded Aluminum Construction**
- **Attractive, Low Profile Design**
- **Standard Single Gang Mount**
- **Converts to Double Action**
- **Glass Rod Optional (one provided)**
- **English and French wording**
- **Spanish wording available**
- **Portuguese wording available**

MRI-MPG1 Wiring

FROM PREVIOUS DEVICE / TO NEXT DEVICE

RED BLACK

+ −

NOTES:
1. MOUNT TO A 2x4x2.25 OUTLET BOX.

MRI-MPG2 Wiring

FROM PREVIOUS DEVICE / TO NEXT DEVICE

RED BLACK

+ −

KEYSWITCH

BLUE BLUE
WHITE WHITE
FROM PREVIOUS DEVICE / TO NEXT DEVICE

NOTES:
1. MOUNT TO MRM-BS300 SURFACE MOUNT BOX.
2. SWITCH RATINGS, ALL MODELS:
   1A @ 30VDC
   0.1A @ 125VAC

MRI-MPG2A Wiring

FROM PREVIOUS DEVICE / TO NEXT DEVICE

RED BLACK

+ −

KEYSWITCH

− +
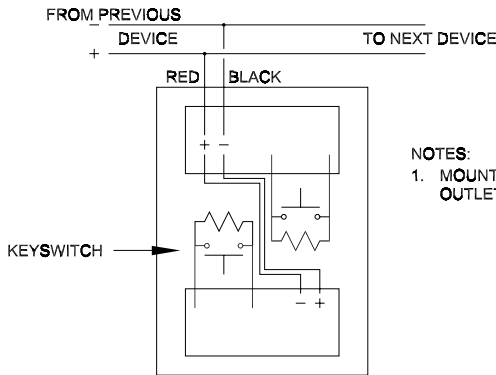
NOTES:
1. MOUNT TO A 2x4x2.25 OUTLET BOX.

ORDERING INFORMATION

Model	Description
MRI-MPG1	Single Stage Addressable Pull Station c/w Glass Rod Feature
MRI-MPG2	Two Stage Addressable Pull Station, 1 Address c/w Glass Rod Feature; Requires MRM-BS300 Surface Mount Box
MRI-MPG2A	Two Stage Addressable Pull Station, 2 Addresses c/w Glass Rod Feature

Accessories

MRM-MSDA	Double Action Lever Kit for MRI-MPG Series
MRD-BS300	Surface Mount Back Box
MRM-GLASS	Glass Rods, 10 count

Spanish

MRI-MPG1-SPJ	Single Stage Addressable Pull Station c/w Glass Rod Feature, Spanish (Fuego, Jale)
MRI-MPG1-SPH	Single Stage Addressable Pull Station c/w Glass Rod Feature, Spanish (Fuego, Hale)
MRI-MPG2-SPJ	Two Stage Addressable Pull Station, 1 Address c/w Glass Rod Feature, Spanish (Fuego, Jale); Requires MRM-BS300 Surface Mount Box
MRI-MPG2-SPH	Two Stage Addressable Pull Station, 1 Address c/w Glass Rod Feature, Spanish (Fuego, Hale); Requires MRM-BS300 Surface Mount Box
MRI-MPG2A-SPJ	Two Stage Addressable Pull Station, 2 Address c/w Glass Rod Feature, Spanish (Fuego, Jale)
MRI-MPG2A-SPH	Two Stage Addressable Pull Station, 2 Address c/w Glass Rod Feature, Spanish (Fuego, Hale)

Portuguese

MRI-MPG1-PT	Single Stage Addressable Pull Station c/w Glass Rod Feature, Portuguese (Fogo, Puxe)
MRI-MPG2-PT	Two Stage Addressable Pull Station, 1 Address c/w Glass Rod Feature, Portuguese (Fogo, Puxe); Requires MRM-BS300 Surface Mount Box
MRI-MPG2A-PT	Two Stage Addressable Pull Station, 2 Address c/w Glass Rod Feature, Portuguese (Fogo, Puxe)

MODUL-R MRI-MPG Series Addressable Pull Stations